


PIN2 (UART Rx) and PIN4 (UART Tx) are used to update the software

26mm x 21mm x 7mm



PCB U122

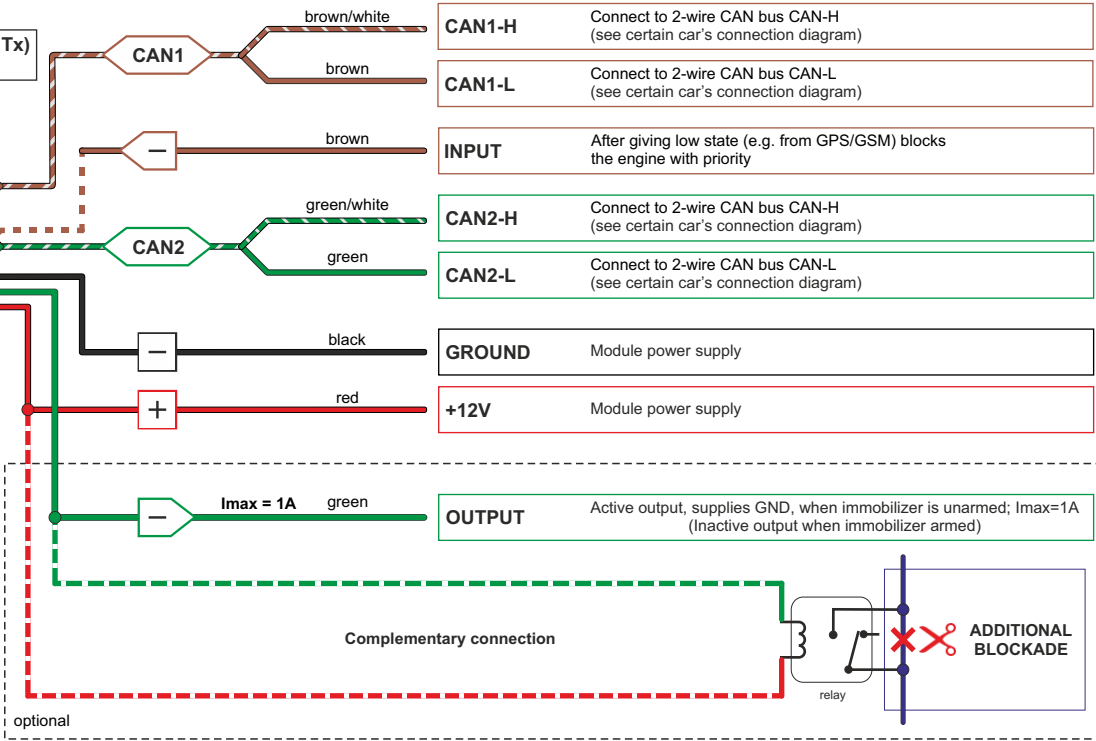

Brand and type: **SEO CANi**

Version: **20xxxxxx**

year: **17** →

rev03